


Exclusively from your Caterpillar® dealer

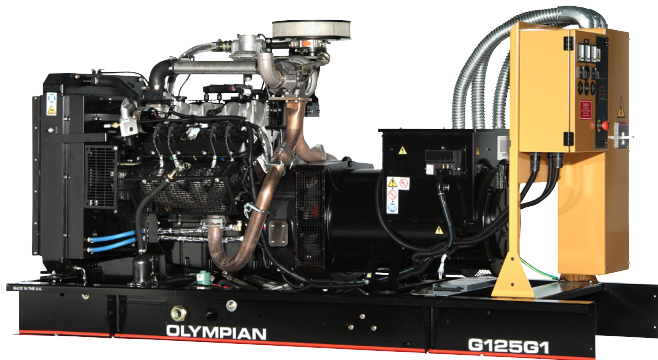

**STANDBY 125-150 kW**  
**PRIME 114-134 kW**  
**60 Hz**

Model	Standby — kW (kVA)	Prime — kW (kVA)
	Natural Gas	Natural Gas
G125G1	125 (156.3)	114 (142.5)
G150G1	150 (187.5)	134.4 (168)

## FEATURES

### GENERATOR SET

- Complete system designed and built at ISO 9001 certified facilities
- Factory tested to design specifications at full load conditions

### ENGINE

- Governor, Isochronous electronic
- Electrical system, 12 VDC
- Cartridge type filters
- Battery, rack, and cables
- Coolant and lube oil drains piped to edge of base

### GENERATOR

- Insulation system, class H
- Drip proof generator air intake (NEMA 2, IP23)
- Electrical design in accordance with BS5000 Part 99, IEC60034-1, EN61000-6, NEMA MG-1.33

### AUTOMATIC VOLTAGE REGULATOR

- Voltage within  $\pm 0.5\%$  3 Phase at steady state from no load to full load
- Provides fast recovery from transient load changes

### COOLING SYSTEM

- Radiator and cooling fan complete with protective guards
- Standard ambient temperatures up to 131° F (55° C)

### MOUNTING ARRANGEMENT

- Heavy-duty fabricated steel base with lifting points
- Anti-vibration pads to ensure vibration isolation
- Complete OSHA guarding
- Stub-up pipe ready for connection to silencer pipework
- Sound attenuated enclosures are available
- Flexible fuel lines to base with NPT connections

### CIRCUIT BREAKER

- UL/CSA listed
- 3-pole with solid neutral
- NEMA 1 steel enclosure, vibration isolated
- Electrical stub-up area directly below circuit breaker

### CONTROL SYSTEM

- EMCP3.1 Control Panel
- Vibration isolated NEMA 1 enclosure with lockable hinged door
- AC and DC wiring harnesses

### EQUIPMENT FINISH

- All electroplated hardware
- Anticorrosive protection prior to painting
- High gloss polyurethane paint for durability and scuff resistance

### QUALITY STANDARDS

- BS4999, BS5000, BS5514, EN61000-6, NEMA MG-1.33, NFPA 110 (with optional equipment)

### DOCUMENTATION

- Operation and maintenance manuals provided
- Wiring diagrams included

### WARRANTY

- All equipment carries full manufacturer's warranty

**S T A N D B Y    1 2 5 - 1 5 0    k W**  
**P R I M E        1 1 4 - 1 3 4    k W**  
**6 0    H z**

**OLYMPIAN™**

*Exclusively from your Caterpillar® dealer*

**OPTIONAL EQUIPMENT\***

**ENCLOSURE**

- SA enclosure (includes internal silencer system)
- Weatherproof enclosure CAWB
- Panel viewing window
- External emergency stop pushbutton

**SILENCER SYSTEM — OPEN UNIT**

- Level 1 silencer
- Level 2 silencer
- Level 3 silencer
- Mounting kit
- Through-wall installation kits

**ENGINE**

- Battery heater
- Lube oil drain pump
- Lube oil sump heater

**CIRCUIT BREAKER**

- Auxiliary contacts
- Shunt trip (100+ amp breakers)

**GENERATOR**

- Anti-condensation heater
- AREP excitation system
- Generator upgrade 1 size
- Permanent magnet generator

**COOLING SYSTEM**

- Coolant heater
- Low coolant temperature alarm
- Low coolant level shutdown
- Radiator transition flange

**MOUNTING ACCESSORIES**

- Seismic (Zone 4) vibration isolators

**CONTROL SYSTEM**

- Control Panel Removal, AC and DC wiring harnesses terminated in sockets
- EMCP3.2 Control Panel

**FUEL SYSTEM**

- Low gas pressure alarm

**REMOTE ANNUNCIATORS**

- EMCP3 remote annunciator panel (supplied loose)

**MISCELLANEOUS ACCESSORIES**


- Toolkit
- Additional operator's manual pack
- Special enclosure color
- UL listing / CSA certification
- French or Spanish Language labels

**EXTENDED SERVICE CONTRACTS**

- Extended Service Coverage available

\*Some options may not be available on all models. Not all options are listed.

**GENERATOR SET DIMENSIONS AND WEIGHTS**

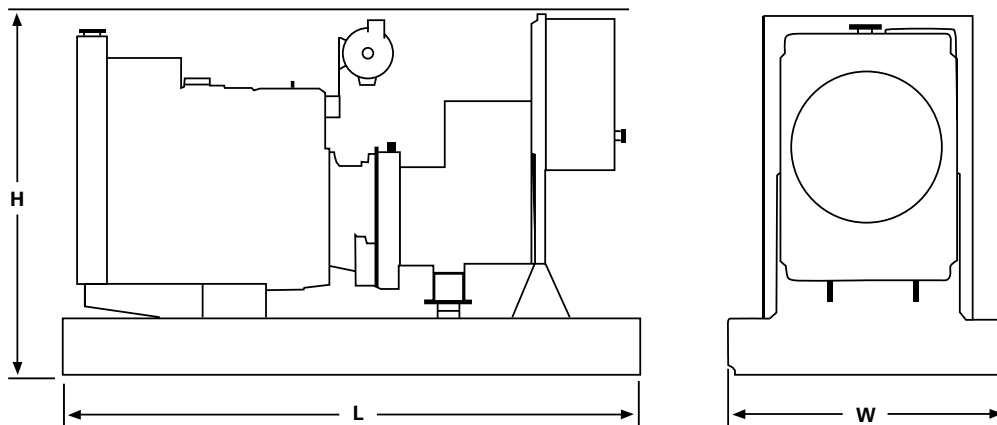

Model	Length in (mm)	Width in (mm)	Height in (mm)	Weight lbs (kg)**
<b>G125G1</b>	102.5 (2604)	43.3 (1100)	57.1 (1449)	3027 (1373)
<b>G150G1</b>	102.5 (2604)	43.6 (1107)	59.8 (1519)	3395 (1540)

**NOTE:** General configuration not to be used for installation. See specific dimensional drawings for detail.

\*\*Includes oil and coolant

**S T A N D B Y     1 2 5 - 1 5 0     k W**  
**P R I M E         1 1 4 - 1 3 4     k W**  
**6 0   H z**

**OLYMPIAN™**

*Exclusively from your Caterpillar® dealer*

**SPECIFICATIONS**



**GENERATOR**

Voltage Regulation ..... ±0.5% 3 Phase  
Phase at steady state from no load to full load  
Frequency ..... ±0.25% for constant load,  
no load to full load  
Waveform Distortion ..... THD less than 4%,  
Radio Interference ..... Compliance with EN61000-6  
Telephone Influence Factor ..... TIF <50  
per NEMA MG 1-32.11  
Telephone Harmonic Factor ..... THF <2%  
Stator Winding ..... 2/3 pitch  
Type ..... Brushless, self excited, self-regulated,  
drip proof, 4-pole, sealed bearing,  
direct coupled by flexible disk,  
12 reconnectable leads  
Insulation ..... Class H per NEMA MG1-1.66  
Temperature Rise ..... Within Class H limits  
Overspeed Capability ..... 125%  
Available Voltages ..... 277/480, 266/460,  
120/240, 127/220, 120/208, 347/600  
Deration ..... Please consult factory  
for available outputs  
Ratings ..... At 77° F (25° C), 500 ft. (152.4 m),  
40% humidity,  
0.8 pf



**ENGINE**

Manufacturer ..... General Motors  
Model ..... Industrial Powertrain  
Type ..... Vortec 8.1L  
**G125G1**  
Aspiration ..... Turbocharged  
**G150G1**  
Aspiration ..... Turbocharged, AA Charge Cooled  
Cylinder Configuration ..... V8  
Displacement — cu in (L) ..... 496 (8.1)  
Bore — in (mm) ..... 4.25 (108)  
Stroke — in (mm) ..... 4.37 (111)  
Compression Ratio ..... 9.1:1  
Governor  
Type ..... Electronic  
Class ..... A1  
Piston Speed — ft/sec (m/sec) ..... 21.9 (6.7)  
Air Cleaner Type ..... Dry, medium duty  
Engine Speed — rpm ..... 1800  
**G125G1**  
Max Power at Rated rpm — hp (kW)  
Standby ..... 210 (156)  
Prime ..... 189 (141)  
BMEP — psi (kPa)  
Standby ..... 186 (1285)  
Prime ..... 168 (1157)  
**G150G1**  
Standby ..... 241 (177)  
Prime ..... 217 (159)  
BMEP — psi (kPa)  
Standby ..... 211 (1457)  
Prime ..... 190 (1309)



**CONTROL PANEL**

NEMA 1 steel enclosure with lockable hinged door  
Vibration isolated mounted Autostart control panel  
Single location customer connector point  
Electrical stub-up area directly below control panel

**RATING DEFINITIONS**

**Standby** — Applicable for supplying continuous electrical power (at variable load) in the event of a utility power failure. No overload is permitted on these ratings. The generator is peak rated (as defined in ISO8528-3).

**Prime** — Applicable for supplying continuous electrical power (at variable load) in lieu of commercially purchased power. There is no limitation to the annual hours of operation and the generator set can supply 10 percent overload power for 1 hour in 12 hours.

**Consult your Olympian representative for more information.**

www.CAT-ElectricPower.com

© 2005 Caterpillar  
All rights reserved.  
Printed in U.S.A.

**STANDBY 125 - 150 kW**  
**PRIME 114 - 134 kW**  
**60 Hz**

**OLYMPIAN™**

*Exclusively from your Caterpillar® dealer*

**G125G1 (3-Phase)**

Materials and specifications are subject to change without notice.

Generator Set Technical Data — 1800 rpm/60 Hz		Natural Gas	
		Standby	Prime
<b>Power Rating</b>	kW (kVA)	125.0 (156.3)	114.0 (142.5)
<b>Lubricating System</b> Type: Full Pressure Oil Filter: Spin-On, Full Flow Oil Type Required: API CF-4 Total Oil Capacity Oil Pan	U.S. gal (L) U.S. gal (L)	2.25 (8.5) 2.13 (8.0)	2.25 (8.5) 2.13 (8.0)
<b>Fuel System</b> Generator Set Fuel Consumption 100% Load 75% Load 50% Load	Cfh (m <sup>3</sup> /hr) Cfh (m <sup>3</sup> /hr) Cfh (m <sup>3</sup> /hr)	1508 (42.7) 1138 (32.2) 779 (22.1)	1375 (38.9) 1042 (29.5) 715 (20.3)
<b>Engine Electrical System</b> Ignition System: Electronic, Distributorless Voltage/Ground: 12/Negative Battery Charging Generator Ampere Rating	Amps	70	70
<b>Cooling System</b> Water Pump Type: Centrifugal Radiator System Capacity Incl. Engine Maximum Coolant Static Head Coolant Flow Rate Minimum Water Temperature to Engine Temperature Rise Across Engine (Air) Heat Rejected to Coolant at Rated Power Total Heat Radiated to Room at Rated Power Radiator Fan Load	U.S. gal (L) Ft H <sub>2</sub> O (m H <sub>2</sub> O) U.S. gal/hr (L/min) °F (°C) °F (°C) Btu/min (kW) Btu/min (kW) Hp (kW)	9.8 (37.1) 17.0 (5.18) 2214 (139.7) 158 (70) 14.0 (8.0) 7734 (136) 2673 (47) 7.0 (5.2)	9.8 (37.1) 17.0 (5.18) 2214 (139.7) 158 (70) 14.0 (8.0) 7245 (127.4) 2502 (44) 7.0 (5.2)
<b>Air Requirements</b> Combustion Air Flow Maximum Air Cleaner Restriction Radiator Cooling Air (zero restriction) Generator Cooling Air Allowable Air Flow Restriction (After radiator) Cooling Airflow (@ rated speed) Rate with restriction	Cfm (m <sup>3</sup> /min) In H <sub>2</sub> O (kPa) Cfm (m <sup>3</sup> /min) Cfm (m <sup>3</sup> /min) In H <sub>2</sub> O (kPa) Cfm (m <sup>3</sup> /min)	272 (7.7) 20.0 (5.0) 7345 (208) 932 (26.4) 0.5 (0.125) 6533 (185)	242 (6.8) 20.0 (5.0) 7345 (208) 932 (26.4) 0.5 (0.125) 6533 (185)
<b>Exhaust System</b> Maximum Allowable Backpressure Exhaust Flow at Rated kW Exhaust Temperature at Rated kW — Dry Exhaust	In Hg (kPa) Cfm (m <sup>3</sup> /min) °F (°C)	2.0 (6.8) 780 (22.1) 1184 (640)	2.0 (6.8) 692 (19.6) 1156 (624)
<b>Generator Set Noise Rating*</b> (Without Attenuation) at 3 ft (1 m)	dB(A)	91.5	91.5

Generator Technical Data		277/480V	120/240V	120/208V	266/460V	127/220V
<b>Motor Starting Capability: (kVA)</b> (30% Voltage Dip)	Self Excited	360	283	283	335	311
	PMG/AREP Excited	469	370	370	437	406
<b>Full Load Efficiencies:</b>	Standby	92.7	92.3	92.3	92.6	92.6
	Prime	92.8	92.5	92.5	92.7	92.7
<b>Reactances (per unit):</b>  Reactances shown are applicable to the standby rating	X <sub>d</sub>	2.75	3.66	3.66	2.99	3.27
	X' <sub>d</sub>	0.10	0.13	0.13	0.10	0.11
	X'' <sub>d</sub>	0.057	0.076	0.076	0.062	0.068
	X <sub>q</sub>	1.65	2.19	2.19	1.79	1.96
	X'' <sub>q</sub>	0.068	0.090	0.090	0.074	0.080
	X <sub>2</sub>	0.063	0.083	0.083	0.068	0.075
	X <sub>0</sub>	0.004	0.006	0.006	0.005	0.005
<b>Time Constants:</b>		t' <sub>d</sub> 100 ms	t'' <sub>d</sub> 10 ms	t' <sub>do</sub> 2865 ms	t <sub>a</sub> 15 ms	

\* dB(A) levels are for guidance only

**S T A N D B Y    1 2 5 - 1 5 0    k W**  
**P R I M E        1 1 4 - 1 3 4    k W**  
**6 0    H z**

**OLYMPIAN™**

*Exclusively from your Caterpillar® dealer*

**G150G1 (3-Phase)**

Materials and specifications are subject to change without notice.

Generator Set Technical Data — 1800 rpm/60 Hz		Natural Gas	
		Standby	Prime
<b>Power Rating</b>	kW (kVA)	150 (187.5)	134.4 (168)
<b>Lubricating System</b> Type: Full Pressure Oil Filter: Spin-On, Full Flow Oil Type Required: API CF-4 Total Oil Capacity Oil Pan	U.S. gal (L) U.S. gal (L)	2.14 (8.1) 1.61 (6.1)	2.14 (8.1) 1.61 (6.1)
<b>Fuel System</b> Generator Set Fuel Consumption 100% Load 75% Load 50% Load	Cfh (m <sup>3</sup> /hr) Cfh (m <sup>3</sup> /hr) Cfh (m <sup>3</sup> /hr)	1621 (45.9) 1250 (35.4) 886 (25.1)	1798 (50.9) 1377 (39.0) 975 (27.6)
<b>Engine Electrical System</b> Ignition System: Electronic, Distributorless Voltage/Ground: 12/Negative Battery Charging Generator Ampere Rating	Amps	70	70
<b>Cooling System</b> Water Pump Type: Centrifugal Radiator System Capacity Incl. Engine Maximum Coolant Static Head Coolant Flow Rate Minimum Water Temperature to Engine Temperature Rise Across Engine (Air) Heat Rejected to Coolant at Rated Power Total Heat Radiated to Room at Rated Power Radiator Fan Load	U.S. gal (L) Ft H <sub>2</sub> O (m H <sub>2</sub> O) U.S. gal/hr (L/min) °F (°C) °F (°C) Btu/min (kW) Btu/min (kW) Hp (kW)	8.1 (30.7) 17.1 (5.2) 2040 (129) 158 (70.0) 10.8 (6.0) 4947 (87) 3128 (55) 17.2 (12.2)	8.1 (30.7) 17.1 (5.2) 2040 (129) 158 (70.0) 10.8 (6.0) 4663 (82) 2929 (51.5) 17.2 (12.2)
<b>Air Requirements</b> Combustion Air Flow Maximum Air Cleaner Restriction Radiator Cooling Air (zero restriction) Generator Cooling Air Allowable Air Flow Restriction (After radiator) Cooling Airflow (@ rated speed) Rate with restriction	Cfm (m <sup>3</sup> /min) In H <sub>2</sub> O (kPa) Cfm (m <sup>3</sup> /min) Cfm (m <sup>3</sup> /min) In H <sub>2</sub> O (kPa) Cfm (m <sup>3</sup> /min)	268 (7.6) 20.0 (5.0) 16033 (454) 933 (26.4) 0.5 (0.125) 12120 (343)	268 (7.6) 20.0 (5.0) 16033 (454) 933 (26.4) 0.5 (0.125) 12120 (343)
<b>Exhaust System</b> Maximum Allowable Backpressure Exhaust Flow at Rated kW Exhaust Temperature at Rated kW — Dry Exhaust	In Hg (kPa) Cfm (m <sup>3</sup> /min) °F (°C)	2.0 (6.8) 989 (28) 1213 (656)	2.0 (6.8) 883 (25) 1193 (645)
<b>Generator Set Noise Rating*</b> (Without Attenuation) at 3 ft (1 m)	dB(A)	100.7	100.8

Generator Technical Data		277/480V	266/460V	127/220V	120/240V 120/208V	347/600V
<b>Motor Starting Capability: (kVA)</b> (30% Voltage Dip)	Self Excited	420	391	363	330	N/A
	PMG/AREP Excited	548	511	476	433	511
<b>Full Load Efficiencies:</b>	Standby	92.9	92.9	92.9	92.5	92.9
	Prime	93.1	93.1	93.1	92.8	93.1
<b>Reactances (per unit):</b>  Reactances shown are applicable to the standby rating	X <sub>d</sub>	2.90	3.16	3.45	3.86	3.16
	X' <sub>d</sub>	0.10	0.11	0.12	0.13	0.11
	X'' <sub>d</sub>	0.058	0.063	0.069	0.078	0.063
	X <sub>q</sub>	1.74	1.89	2.07	2.32	1.89
	X'' <sub>q</sub>	0.069	0.075	0.082	0.092	0.075
	X <sub>2</sub>	0.063	0.069	0.075	0.084	0.069
	X <sub>0</sub>	0.005	0.005	0.006	0.007	0.005
<b>Time Constants:</b>		t' <sub>d</sub> 100 ms	t'' <sub>d</sub> 10 ms	t' <sub>do</sub> 2966 ms	t <sub>a</sub> 15 ms	

\* dB(A) levels are for guidance only